



Irritrol[®] *Get more done*[™]

Junior Max (JR Max[™]) Controller

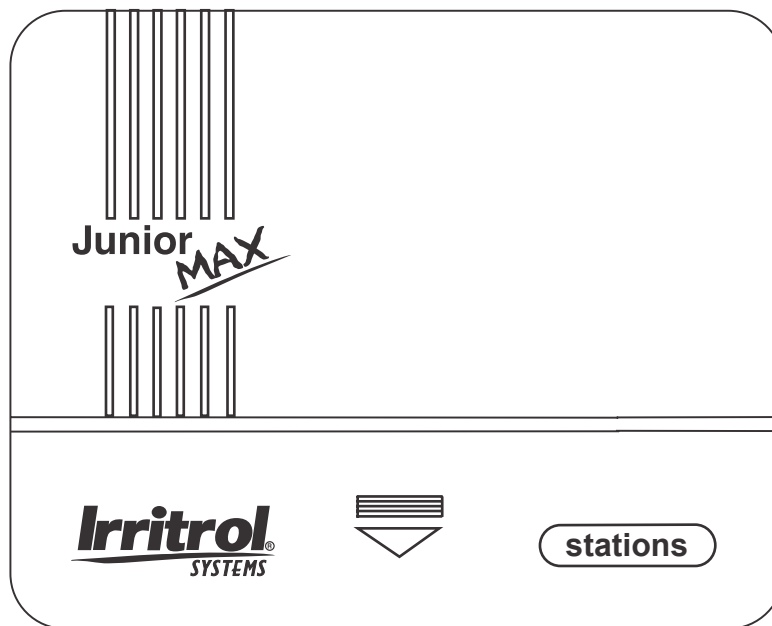

Operating Instructions

INSTALLATION INSTRUCTIONS - INDOOR MODELS:

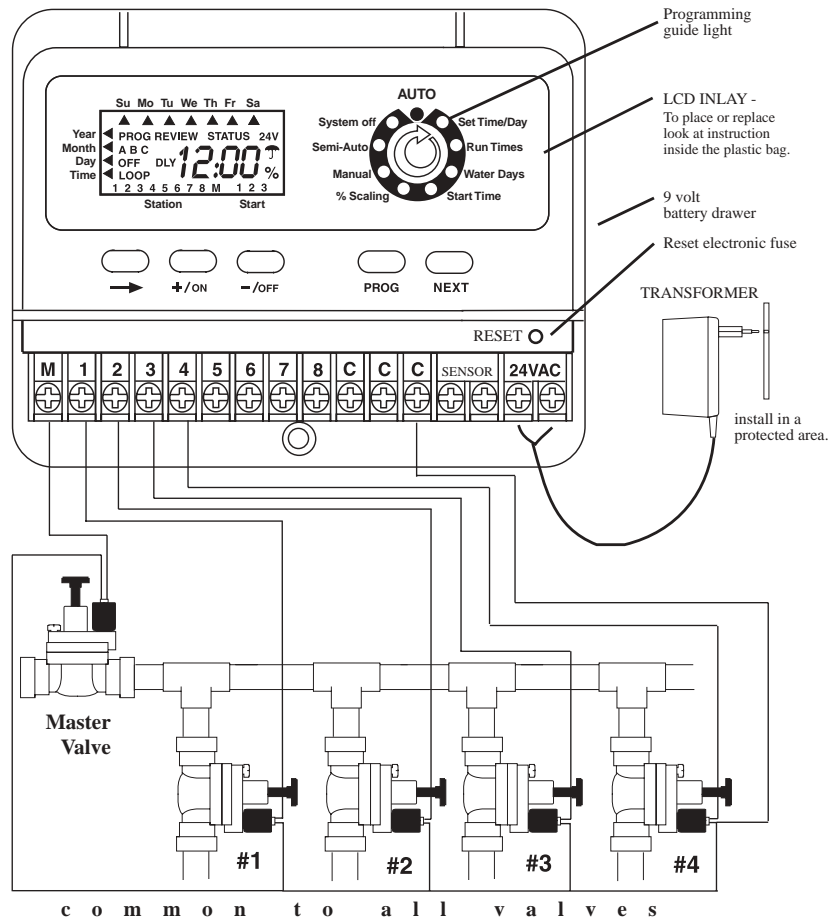

c o m m o n t o a l l v a l v e s

Remove the lower cover. Place the unit on the wall using the top screw slot. Level the controller, then insert screw into the lower screw hole under the terminal block. Connect the solenoid wires to the terminal block. Connect one wire from the solenoid to its respective station number on the terminal block and the other wire to the C-common terminal. Connect the transformer wires to the 24 VAC terminal.

Note: A 9 VDC battery must be installed for proper operation of the controller. The 9 volt battery compartment is located on the right side of the case. It is marked "Push". Push it to release the battery drawer. The 9 volt battery powers the LCD display in the absence of AC power and allows "Arm Chair Programming". Program information is retained during power outages by an on-board lithium battery.

NOTE: Only after all the wiring is completed and checked should the transformer be plugged into AC power.

INSTALLATION INSTRUCTIONS - OUTDOOR MODELS:


Remove the lower cover of the Junior Max controller by sliding it down. Place the unit on the wall using the top keyhole screw slot. Level the controller and then insert screws into one or more of the three lower screws holes at the cabinet bottom. Drive the screws through the plastic flashing that keep the cabinet weather resistant. If installing the controller on drywall or masonry, install screw anchors to prevent the screws from loosening. Connect the solenoid wires to the terminal block through the 12mm ($1/2$ ") hole in the right side of the cabinet bottom. If the solenoid wires are being installed in conduit, there is a knock-out on this hole that will accept a 24mm (1") male conduit adapter. Connect the wires as shown for the indoor model. Next connect the power wires.



Warning: AC power wiring must be installed and connected by qualified personnel only. All electrical components and installation procedures must comply with all local and national electrical codes. Some codes may require a means of disconnection from the AC power source installed in the fixed wiring and having a contact separation of at least 3mm (0.120") in the line and neutral poles.

Make sure the power is OFF prior to connecting the controller.


The hole on the left side of the cabinet bottom accepts a 12mm ($1/2$ ") male conduit adapter. Route the power and equipment ground wires from the power source, through the conduit and into the transformer connector compartment. **Note: The terminal block accepts wire size up to 4mm² (12 AWG).** Remove 10mm ($3/8$ ") of insulation from the wire ends. Using a small flat bladed screwdriver, secure the wires as follows: Line or Line 1 (L1) to L, Neutral or Line 2 (L2) to N and Equipment Ground to G. Install compartment cover. Apply power to the controller.

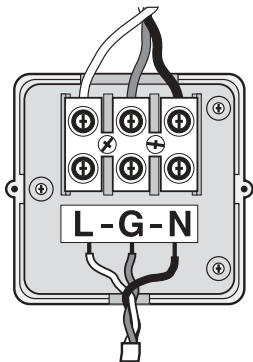

9 VDC Battery. The 9 volt battery compartment is located below the 24VAC terminals.

The 9 volt battery powers the LCD display in the absence of AC power and allows programming without AC power. Program information is retained during power outages by an on-board lithium battery.

Sensor connection and operation:

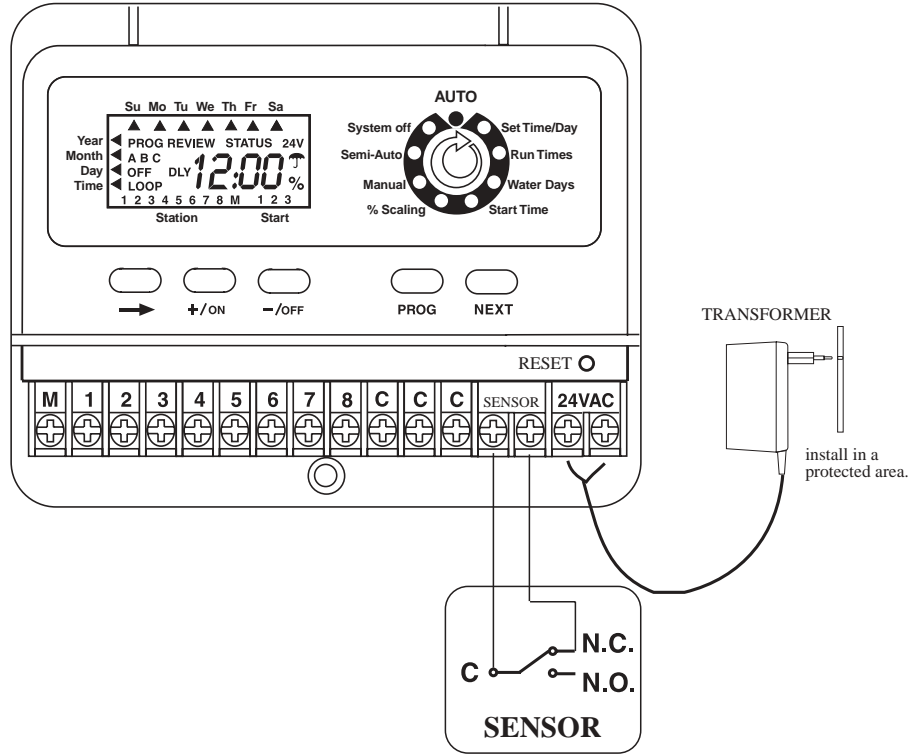

To connect a rain sensor, remove the jumper wire from the sensor terminal and connect one wire of the Irritrol Rain Sensor to the C-common terminal and the other wire to the N.C. (normally closed) terminal. As soon as the Rain Sensor contacts change from the N.C. position to the N.O. (normally open) position, irrigation will be suspended. Irrigation will resume as soon as the Rain Sensor dries and its contacts return to the N.C. position.

When irrigation is suspended due to the Rain Switch, the display shows: OFF ☂

PROGRAMMING:

It is recommended to press the RESET button to clear the memory.




Press NEXT to advance to SET TIME/DAY


Program Position: SET TIME/DAY

Set the current YEAR, MONTH, DAY & TIME.

Set the YEAR with +/ON or -/OFF

Press 


Set the MONTH with +/ON or -/OFF

Press 

Set the DAY with +/ON or -/OFF

Press 

Set the TIME with +/ON or -/OFF

Press  if you wish to go back to YEAR setting.

NOTE: If you press and hold either +/ON or -/OFF continuously, the digits will advance quickly.



Press NEXT to advance to RUN TIME

Program Position: RUN TIME

This controller has 3 independent programs: A, B & C. Select the stations you wish to have for each program. Program A is the first program.

You can assign stations to a program by entering RUN TIME for these stations.

Unselected stations in a program will remain OFF.

Press PROG to select the program to be set.

Press +/ON or -/OFF to set the desired RUN TIME.

Press  to advance to next station.

To RESET Run Time back to "OFF": Press BOTH +/ON and -/OFF for a few seconds until OFF is displayed.

To disable the MASTER VALVE from working in this program:


Press  until "M" starts flashing. The display show "On".

Press -/OFF to disable the MASTER VALVE. Press +/ON to resume its operation.



Press NEXT to advance to WATER DAYS

Program position: WATER DAYS

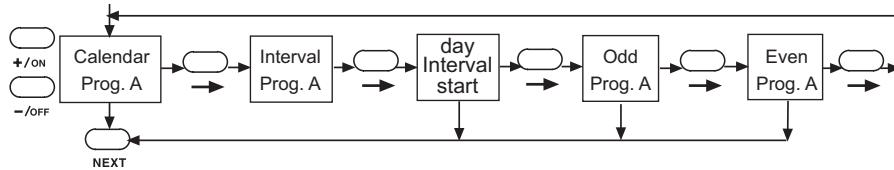

There are 4 choices for your days selection:

CAL - Select days of the week. (Default all days are ON)

Int - Select days interval, 1-7 days, and the 1st day to start the interval

Odd - Irrigation on Odd days (31st day is skipped)

En - Irrigation on Even days.

In CAL position: Press +/ON for operating day or -/OFF to skip the day.

Press for Interval selection or NEXT for next programming step.

In "Int" position: Press +/ON or -/OFF to select your days interval.

Press to select the 1st day to start the watering using +/ON or -/OFF.

In Odd position: Press to select Even days.

NOTE: 31st day of month is skipped in ODD water days.

In Even position: Press if you wish to go back to CALENDAR.

Press NEXT to advance to START TIMES.

Program position: START TIMES

3 start times per day are available for each program.

Press +/ON or -/OFF to set the first start time.

Press for start #2 and #3 and repeat with +/ON or -/OFF to set the time.

To RESET Start Time back to "OFF": Press BOTH +/ON and -/OFF for a few seconds until OFF is displayed.

After setting start times, you can Press PROG to start entering data for the next program.

The program position will automatically move back to the RUN TIME position of the next program.

If you press NEXT you advance to the "% Scaling" position.

Program position: % SCALING (Seasonal adjust)

In this program position, you can increase or decrease the RUN TIMES of all stations in a program by percentage scaling from 0% (program OFF) to 200% in 10% increments.



Press PROG to select the program you wish to % scale.

Press +/-ON or +/-OFF to change adjustment from 100%

The initial RUN TIME set represents 100%. Scaling increases or decreases this initial run time. The new adjusted run time will be displayed whenever the program is operating. The “%” icon will also be displayed whenever that program is operating or being reviewed to alert you that the run time has been adjusted from the initial setting.

To set a program to "OFF"

If you wish to stop irrigation of a program, set percentage scaling to 0%. The display will show that program is OFF.

To resume normal operation of that program, advance to "% SCALING" and increase the percentage to your desired value. Increasing to 100% will set RUN TIME to its original value.



Press PROG to select the program.



Press NEXT to advance to MANUAL.

Program position: MANUAL

In this MANUAL mode, you can set RUN TIME for each of the stations you wish to start manually. Stations will start in sequence.

Press +/-ON or +/-OFF to set the station RUN TIME.

Press  to advance to next station.

To turn ON the 1st station in the sequence:



Press NEXT to AUTO-RUN position.

Press +/-OFF (in AUTO-RUN position) to turn OFF the sequence.

All stations with RUN TIME will be displayed. Operating stations will flash and the display will show the remaining RUN TIME of the station (count down).




Press NEXT to advance to SEMI-AUTO.

Program Position: SEMI-AUTO

In this dial position you can start a sequence of all stations programmed in the selected program.

Press  to select the program you wish to operate.

Display shows all the stations programmed in the selected program

Press  if you wish to select another station as the 1st station.

Press +/ON to turn ON the sequence.


Press  to skip from a working station to the next one in the sequence.

Press -/OFF to turn OFF the sequence (before it is completed).

The display will show the remaining RUN TIME of each operating station.

Press  to advance to SYSTEM OFF.

Program Position: SYSTEM OFF

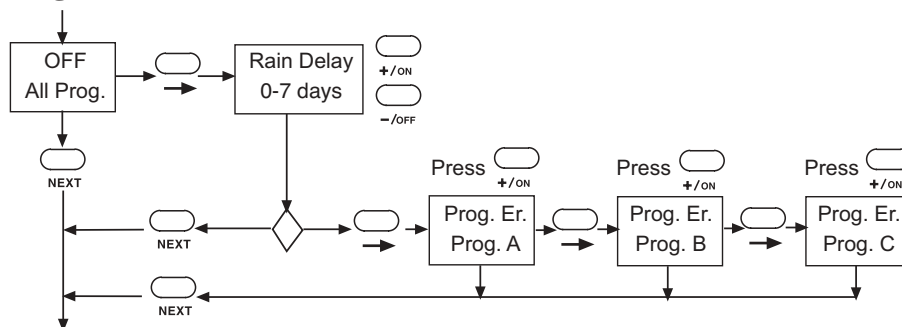

3 main functions can be performed in this program position.

TURN ALL PROGRAMS OFF - Irrigation is suspended for all programs. It will remain suspended as long as the programming guide light stays in this position.

OFF

Press  to set next function OR Press NEXT to advance to AUTO-RUN

RAIN DELAY: - Irrigation is delayed for the selected number of days.


DLY  Press +/ON or -/OFF to select the number of days.

The display will show the umbrella, DLY=DELAY and the day the irrigation will resume (Flashing).

Press  to set next function OR Press  to advance to AUTO-RUN

PROGRAM ERASE – You can erase all data entered into a program. Can be done for a selected program.


PE

Press  to select the program you wish to erase.

Press +/ON to erase. PE will flash 5 times.

Press  to advance to AUTO-RUN.

Program position: AUTO-RUN

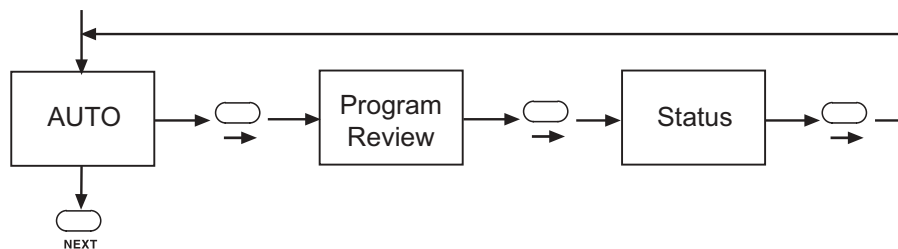

This position is used to provide information regarding the operation as well as for reviewing all data stored in the irrigation programs.

Following is the list of information you can observe on the display:

- Current Time & Day
- A program(s) in OFF position
- Information regarding the operating station: program, station and remaining run time
- Active Rain Delay
- If irrigation is suspended due to SENSOR input
- Power failure indication

To turn OFF the working cycle, press  to SEMI-AUTO and press -/OFF.

If you wish to review what data you have in each program:

Press  to PROGRAM REVIEW. Press  to select the program.

Press +/ON to start the review.

If you wish to have a complete status report on the operating station:

Press  to STATUS.

Remaining station RUN TIME will be displayed as well as the operating program, station number and active start time.

Press  to return to AUTO-RUN position.

Program C – Looping Program

Program C runs as a regular program if only one start time is used. Entering a second and third start time changes program C to a looping program. The controller recognizes this and displays “LOOP” in the LCD display.

A looping program allows the station assigned to program C to be run repeatedly throughout a 24 hour period. A loop program is desirable for seed germination, asexual propagation, misting and cooling. Sensors such as thermostats, humidity sensors, etc., can be incorporated into the looping program.

NOTE: Important Differences

1. If only one start time is entered, the controller considers Program C as a regular program and run times are set and displayed in hours and minutes.
2. When a second start time is entered, the controller recognizes that program C is being set as a looping program. Run times are now set and displayed as minutes and seconds. The second and third start times are still set and displayed in hours and minutes. As an example, the third start time is the loop delay. You want a delay of 120 minutes. The display will show 2:00 or two hours.
3. Loop delay includes the station Run Times
4. Loop delay default time is 5 minutes


Example: You are germinating a seed lawn and wish to irrigate every half-hour between 7:00 AM and 6:00 PM. Station run time is 2 minutes.

Run Time = 2:00 = 2 minutes

“Start 1” = 7:00 AM = Time the loop will start

“Start 2” = 6:00 PM = Time the loop will stop

“Start 3” = 0:30 = 30 minute loop delay

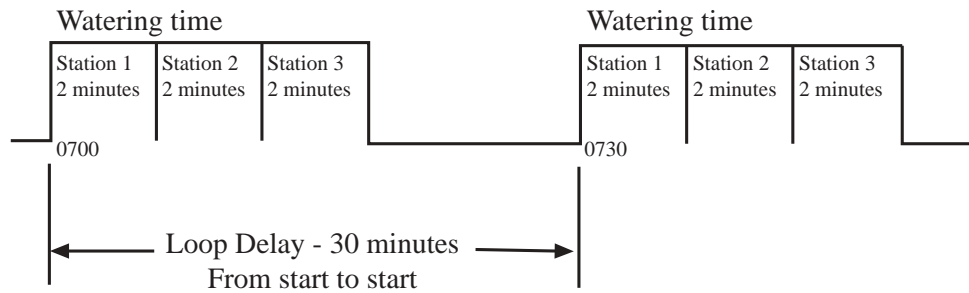

Junior MAX Custom Watering Plan

3 Program Controller

Date: _____

		Program A	Program B	Program C
Station	Description	Duration	Duration	Duration (min. & sec.)
1				
2				
3				
4				
5				
6				
7				

	Program A	Program B	Program C
Irrigation Days	Su Mo Tu We Th Fr Sa	Su Mo Tu We Th Fr Sa	Su Mo Tu We Th Fr Sa
Days Cycle			
Start 1			Loop Start:
Start 2			Loop End:
Start 3			Loop Delay:

Electromagnetic Compatibility

Domestic: This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a FCC Class B computing device in accordance with the specifications in Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Relocate the irrigation controller with respect to the receiver.
- Move the irrigation controller away from the receiver.
- Plug the irrigation controller into a different outlet so that the irrigation controller and receiver are on different branch circuits.

If necessary, the user should consult the dealer or an experienced radio/television technician for additional suggestions. The user may find the following booklet prepared by the Federal Communications Commission helpful:

"How to Identify and Resolve Radio-TV Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington, DC 20402. Stock No. 004-000-00345-4.

International: This is a CISPR 22 Class B product.

Irritrol®

www.irritrol.com

Tel: 800-634-TURF (8873)

Fax: 800-862-8676

© 2008 Irritrol